



	REVISIONS						
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN	CHECKED	APPROVED
A	N/A		INITIAL RELEASE				

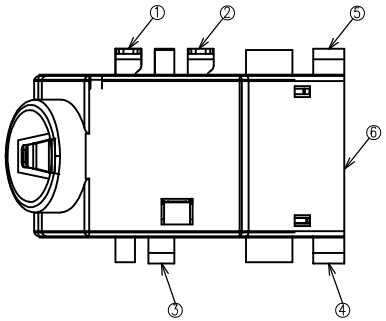





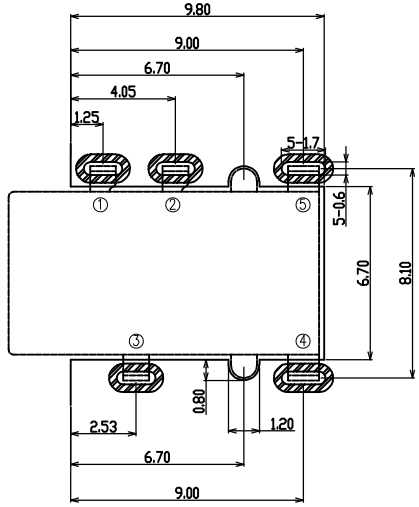



PCB LAYOUT TOP VIEW

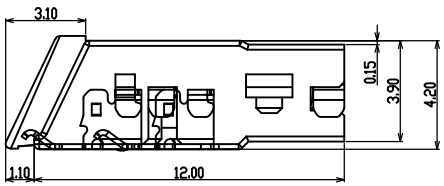



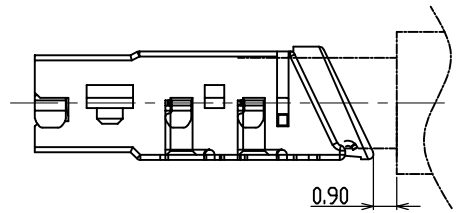

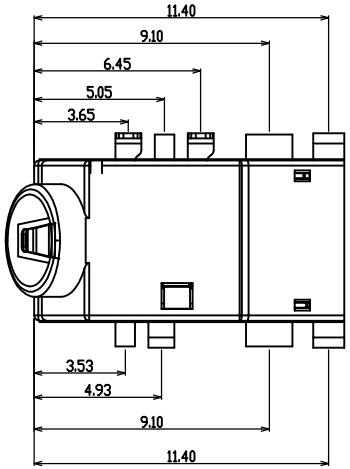

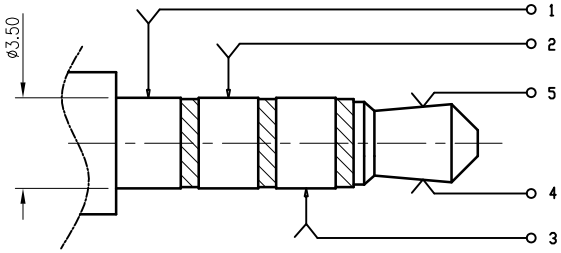

PULG SCHEMATIC

NOTES:
1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 1000Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
7. CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.;

ITEM	PART NAME	Q'TY	MATERTAL	DESCRIPTION	REMARK
⑥	HOUSING	1	HIGHT TEMPERATURE PLASTIC		Black
⑤	CONTACT E	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
④	CONTACT D	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
③	CONTACT C	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
②	CONTACT B	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
①	CONTACT A	1	PHOSPHOR BRONZE 0.20T	Gold Flash	

MEASURE POINT:
QUADRANT POINT (QP)
TANGERCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ±0.25
X.x ±0.20
X.xx ±0.15
X.xxx ±0.10
ANGULAR ±3°

WFD CONN 深圳市旺富达电子有限公司
Shenzhen WFD Electronics Co.Ltd..

DESIGN	Liu Miao	DATE 2012/08/2	TITLE:
CHECKED	SIMON	DATE	
APPROVED	DAVID	DATE	
PART NO. MPJ-05C358-05-G-036		REV.: A	SCALE: 1:1 UNIT: mm
DRAWING NO.		SIZE: A4	SHEET: 1/1