



RoHS Compliant




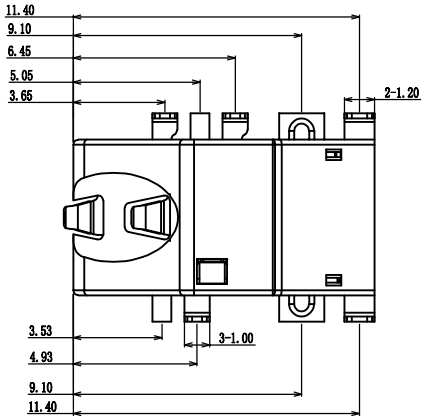


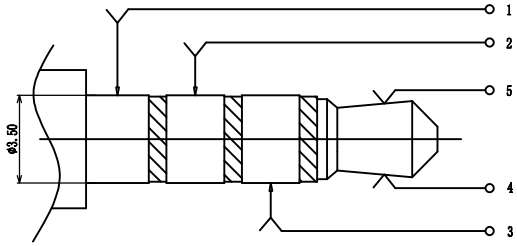



PULG SCHEMATIC

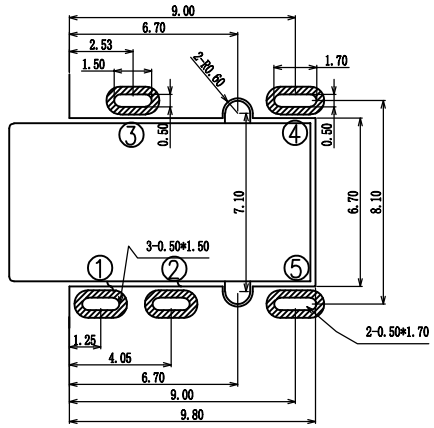

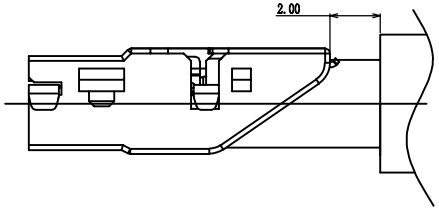

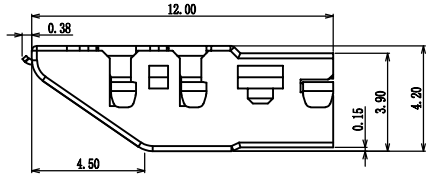



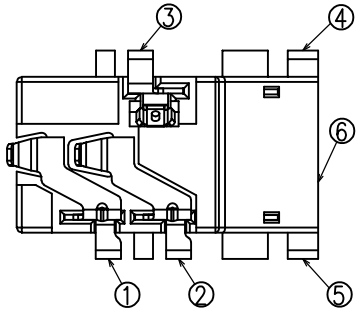

NOTES:
1. CONTACT CURRENT RATING: 12V DC,1A.
2. CONTACT RESISTANCE: 50mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.,500V DC/1min;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR INSERTION FORCES: 0.3kgf-3kgf;
7. CONNECTOR EXTRACTION FORCES: 0.3kgf-3kgf;
8. OPERATING TEMPERATURE RANGE: -20 to +80°C;

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
6	HOUSING	HIGH TEMP	BLACK	
5	TERMINAL 5	COPPER ALLOY	Au PLATED	
4	TERMINAL 4	COPPER ALLOY	Au PLATED	
3	TERMINAL 3	COPPER ALLOY	Au PLATED	
2	TERMINAL 2	COPPER ALLOY	Au PLATED	
1	TERMINAL 1	STAINLESS STEEL	Au PLATED	

UNLESS OTHERWISE,
GENERAL TOLERANCE:
X.xxx ±0.10
X.xx ±0.20
X.x ±0.30
X. ±0.50
ANGULAR:
X.xx ±1°
X.x ±3°
X. ±5°

WFDCONN 深圳市旺富达电子有限公司
Shenzhen WFD Electronics Co.Ltd..

TITLE:
ø3.50mm PHONE JACK CONNECTOR
H=4.20mm 沉板2.55mm

P/N: MPJ-05O356-05-G-037
MODEL:
DRAW NO.:

THIRD ANGLE PROJECTION

UNIT:	SCALE:	SIZE:	SHEET:
mm	1:1	A4	1/1

ECN NO.	REV.	DESCRIPTION	DATE	CHANGE
N/A	A	NEW DRAWING	2019.04.12	Liu Miao

DESIGN	Liu Miao	2019.04.12
CHECK	SIMON	2019.04.12
APPROVAL	DAVID	2019.04.12