



RoHS Compliant

NOTES:
1.CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES:
29.4N (3.00Kgf) MAX.;
7. CONNECTOR UNMATING FORCES:
2.94N(0.30Kgf) MIN.;

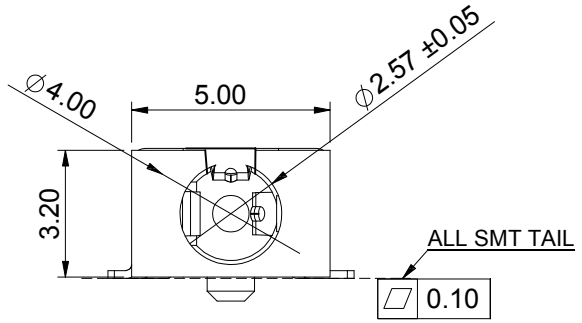


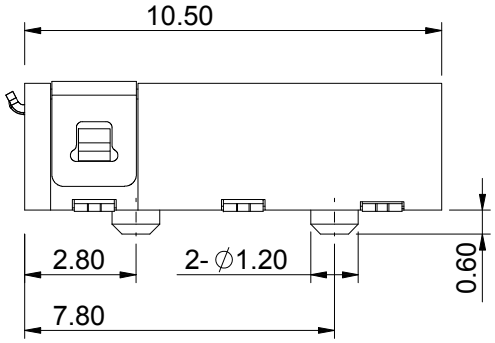


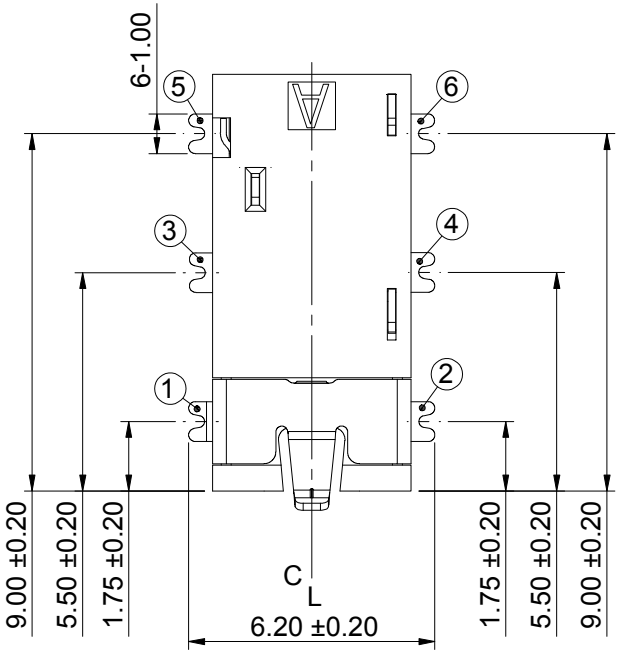

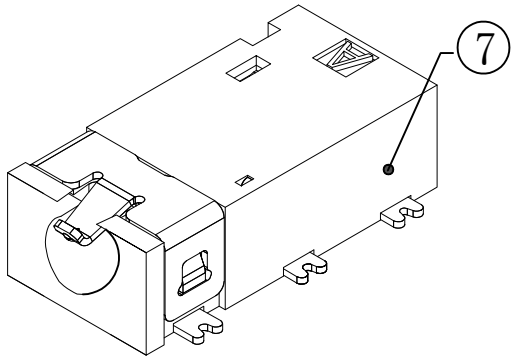


RECOMMENDED PCB LAYOUT(TOP VIEW)
(GENERAL TOLERANCE ±0.05)

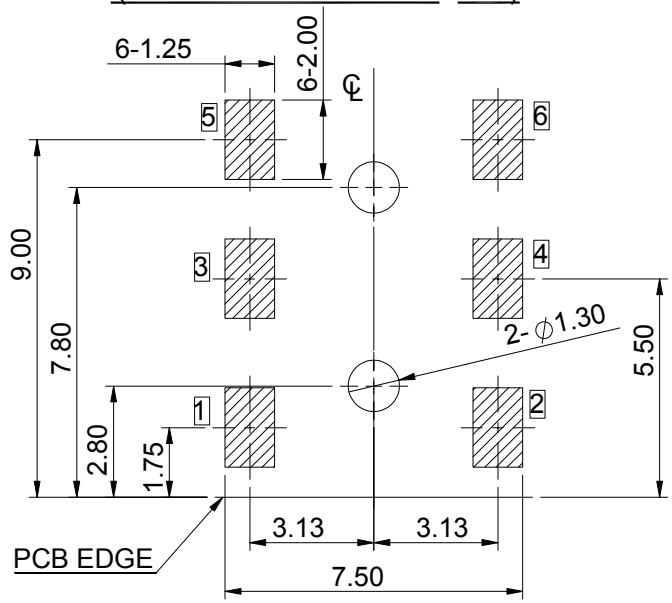



SCHEMATIC

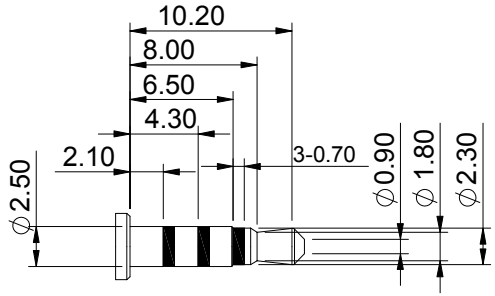

(∅2.50mm 4 POLE PLUG DETAIL DRAWING)

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
7	HOUSING	HIGH TEMP	BLACK	
6	TERMINAL6	COPPER ALLOY		
5	TERMINAL5	COPPER ALLOY		
4	TERMINAL4	COPPER ALLOY		
3	TERMINAL3	COPPER ALLOY		
2	TERMINAL2	COPPER ALLOY		
1	TERMINAL1	COPPER ALLOY		

UNLESS OTHERWISE, GENERAL TOLERANCE:
X.xxx ±0.10
X.xx ±0.20
X.x ±0.30
X. ±0.50
ANGULAR:
X.xx ±1°
X.x ±3°
X. ±5°

WFDCONN 深圳市旺富达电子有限公司 Shenzhen WFD Electronics Co.Ltd..

TITLE: Ø2.50mm PHONE JACK CONN. 客户图

P/N: MPJ-06025-06-G-040
MODEL:
DRAW NO.:

THIRD ANGLE PROJECTION

UNIT:	SCALE:	SIZE:	SHEET:
mm	1:1	A4	1/1

DESIGN	Liu Miao	2018.09.30		
CHECK	SIMON	2018.09.30		
APPROVAL	DAVID	2018.09.30		

ECN NO.	REV.	DESCRIPTION	DATE	CHANGE
N/A	A	NEW DRAWING	2018.09.30	Liu Miao