


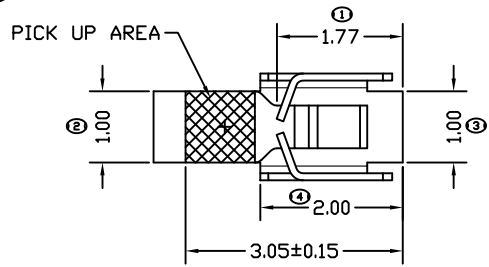
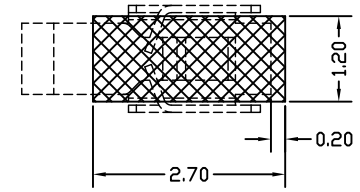



REV	DESCRIPTION	APPR	CHECK	DRAW	DATE
△	原始图档			Liu Miao	120620


RoHS Compliant




- PRODUCT NO.
1. SPECIFICATIONS:
- CONTACT RESISTANCE: 80MΩ MAX
 - VOLTAGE RATING: 1.5V/AC/DC/MAX
 - CURRENT RATING: 1.0A/MAX
 - PRE-LOAD FORCE: 0.5±0.1N ON CONTACT POINT
 - MAX. BEAM DEFLECTION: 0.7±0.1N ON CONTACT POINT
 - DURABILITY: 200 CYCLES
 - OPERATING TEMPERATURE: -20°C~80°C
2. MATERIAL:
- STAINLESS STEEL T=0.10MM
3. FINISH:
- 1u" AU ON CONTACT AREA
 - GOLD FLASH PLATING ON SOLDER AREA
 - 80u" MIN. NICKEL UNDERPLATING OVERALL

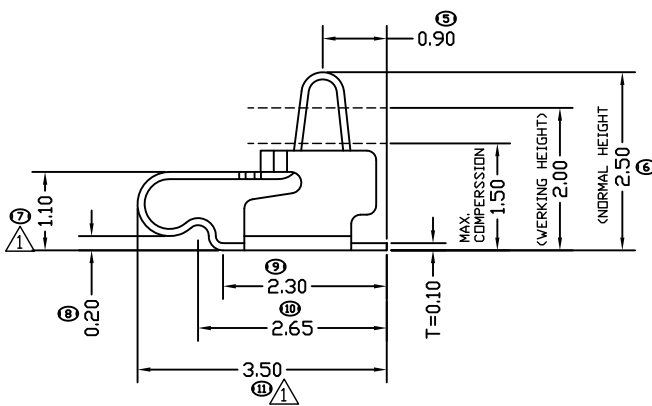

P. C. B. LAYOUT
TOLERANCE: ±0.05

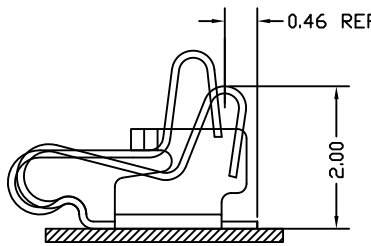

STATE AT WORKING HEIGHT(H=2.00)

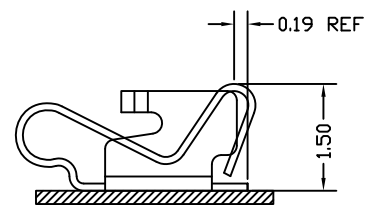

STATE AT WORKING HEIGHT(H=1.50)

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE: 1:1	NUMBER:	WFDconn 深圳市旺富达电子有限公司 Shenzhen WFD Electronics Co.Ltd..
		MM	INCH	MATERIAL: HRC:	
▽0	.X	±0.25	.X	④----	TITLE: 2.5H 带扣弹片
	.XX	±0.20	.XX	⑤----	DRAWN BY: Liu Miao DATE: 120620
	.XXX	±0.15	.XXX	⑥----	CHECKED BY: DATE:
▽C0	ANGULAR ±1°		APPROVED BY: DATE:		THIRD ANGLE PROJECTION
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		PART NO. WFD-3001M2160022-4		REVISE ON CAD ONLY
			DWG NO.		SHEET NO. 1/1