


REV	DESCRIPTION	APPR	CHECK	DRAW	DATE
0	原始图档			Liu Miao	121101

RoHS Compliant

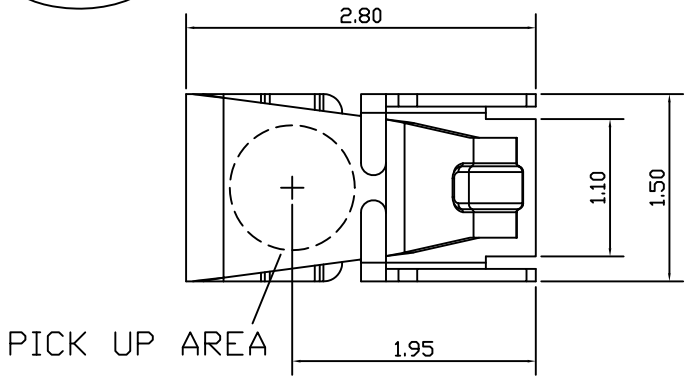


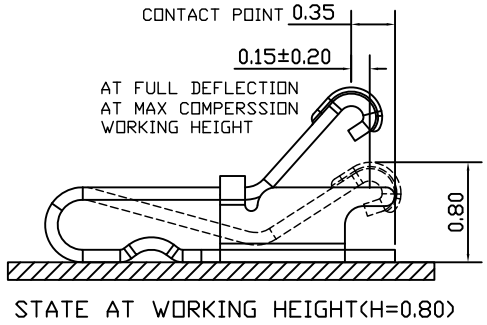



STATE AT WORKING HEIGHT(H=0.80)

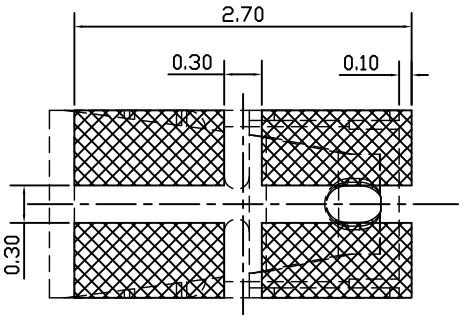


P.C.B LAYOUT
TOLERANCE: ±0.05

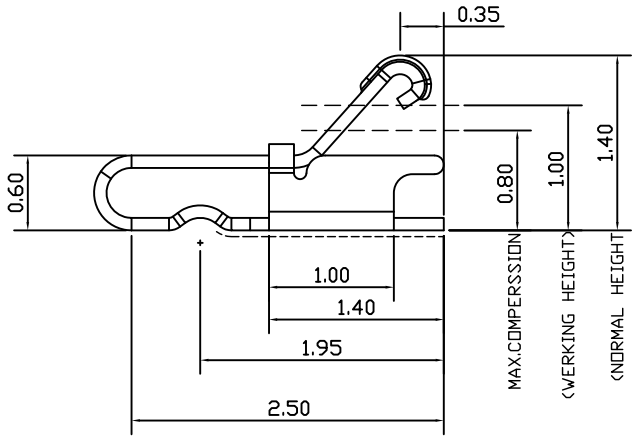



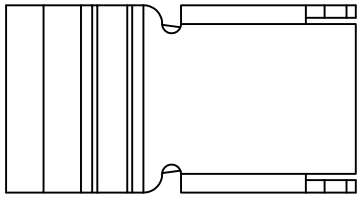

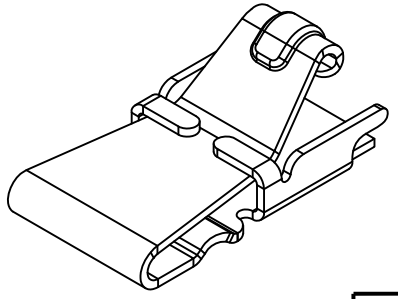

PRODUCT NO.
1. SPECIFICATIONS:
   1.1. CONTACT RESISTANCE:30MΩ MAX
   1.2. VOLTAGE RATING:1.5V/AC/DC/MAX
   1.3. CURRENT RATING:1.0A/MAX
   1.4. OPERATING TEMPERATURE:-20°C~80°C
2. MATERIAL:
   2.1. STAINLESS STEEL T=0.10MM
3. FINISH:
   3.1. 1u"AU ON CONTACT AREA
   3.2. GOLD FLASH PLATING ON SOLDER AREA
   3.3. 80u" MIN. NICKEL UNDERPLATING OVERALL

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			
	MM		INCH	
	.X	±0.25	.X	呼----
	.XX	±0.20	.XX	呼----
	.XXX	±0.15	.XXX	呼----
	ANGULAR ±1°			
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			

SCALE: 1:1	NUMBER:
MATERAIL:	HRC:
DRAWN BY Liu Miao	DATE 121101
CHECKED BY	DATE
APPROVED BY	DATE

深圳市旺富达电子有限公司 Shenzhen WFD Electronics Co.Ltd.

TITLE: 带扣弹片 1.4H

THIRD ANGLE PROJECTION | REVISE ON CAD ONLY

PART NO. WFD-3001M2160022-8 | DWG NO. | SHEET NO. 1/1

A4