



REV	DESCRIPTION	APPR	CHECK	DRAW	DATE
0	原始图档		SIMON	Liu Miao	130411

RoHS Compliant

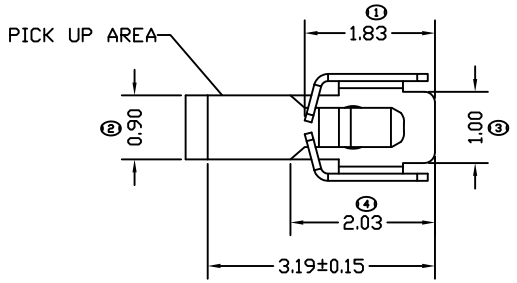




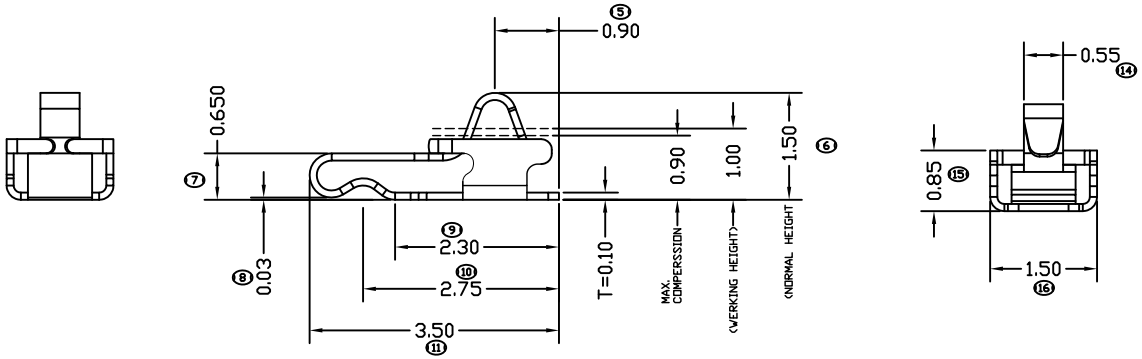




PRODUCT NO.


1. SPECIFICATIONS:
   - 1.1. CONTACT RESISTANCE:80MΩ MAX
   - 1.2. VOLTAGE RATING:1.5V/AC/DC/MAX
   - 1.3. CURRENT RATING:1.0A/MAX
   - 1.4. PRE-LOAD FORCE:0.5±0.1N ON CONTACT POINT
   - 1.5. MAX.BEAM DEFLECTION:0.7±0.1N ON CONTACT POINT
   - 1.6. DURABILITY:200 CYCLES
   - 1.7. DPERATING TEMPERATURE:-20°C~80°C
2. MATERIAL:
   - 2.1. STAINLESS STEEL T=0.10MM
3. FINISH:
   - 3.1. 1u"AU ON CONTACT AREA
   - 3.2. GOLD FLASH PLATING ON SOLDER AREA
   - 3.3. 80u" MIN. NICKEL UNDERPLATING OVERALL

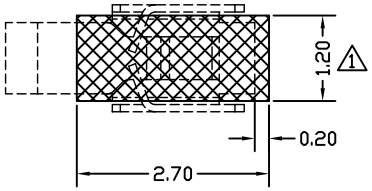

P.C.B LAYOUT
TOLERANCE:±0.05



STATE AT WORKING HEIGHT(H=1.00)



STATE AT WORKING HEIGHT(H=0.90)

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			
	MM		INCH	
▽ 0	.X	±0.30	.X	㊣----
	.XX	±0.20	.XX	㊣----
	.XXX	±0.10	.XXX	㊣----
	ANGULAR ±1°			
C 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			

SCALE: 1:1	NUMBER:
MATERAIL:	HRC:
DRAWN BY: Liu Miao	DATE: 130411
CHECKED BY	DATE
APPROVED BY	DATE

WFD CONN 深圳市旺富达电子有限公司 Shenzhen WFD Electronics Co.Ltd..

TITLE: 1.5H 带扣弹片

THIRD ANGLE PROJECTION | REVISE ON CAD ONLY

PART NO.: WFD-3001M2160022-9 | DWG NO. | SHEET NO.: 1/1

A4