



REV	DESCRIPTION	APPR	CHECK	DRAW	DATE
0	原始图档		SIMON	Liu Miao	130111


RoHS Compliant

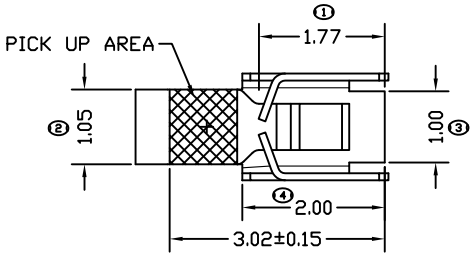



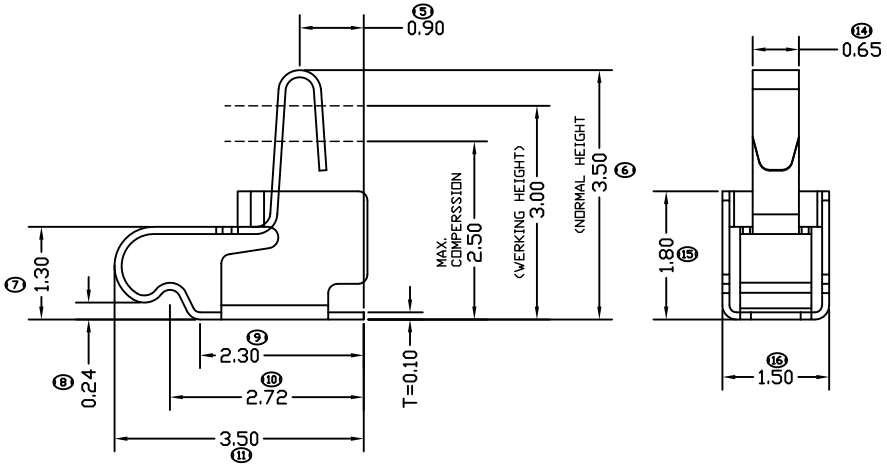







P.C.B LAYOUT
TOLERANCE: ±0.05

PRODUCT NO.
1. SPECIFICATIONS:
   1.1. CONTACT RESISTANCE:80MΩ MAX
   1.2. VOLTAGE RATING:1.5V/AC/DC/MAX
   1.3. CURRENT RATING:1.0A/MAX
   1.4. PRE-LOAD FORCE:0.5±0.1N ON CONTACT POINT
   1.5. MAX.BEAM DEFLECTION:0.7±0.1N ON CONTACT POINT
   1.6. DURABILITY:200 CYCLES
   1.7. OPERATING TEMPERATURE:-20°C~80°C
2. MATERIAL:
   2.1. STAINLESS STEEL SUS301 T=0.10MM
3. FINISH:
   3.1. 1u"AU ON CONTACT AREA
   3.2. GOLD FLASH PLATING ON SOLDER AREA
   3.3. 80u" MIN. NICKEL UNDERPLATING OVERALL

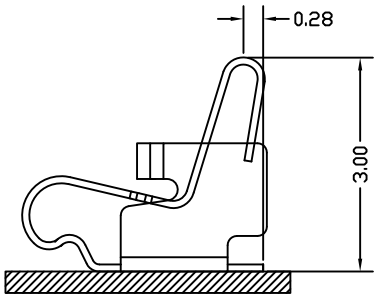

STATE AT WORKING HEIGHT(H=3.00)

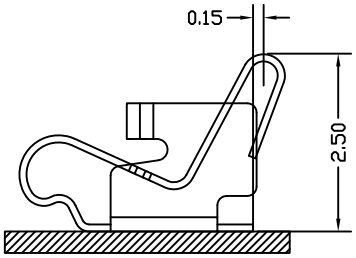

STATE AT WORKING HEIGHT(H=2.50)

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			
	MM		INCH	
▽0	.X ±0.25	.X	IT----	
	.XX ±0.20	.XX	IT----	
	.XXX ±0.15	.XXX	IT----	
	ANGULAR ±1°			
C▽0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			

SCALE: 1:1	NUMBER:
MATERAIL:	HRC:
DRAWN BY Liu Miao	DATE 130111
CHECKED BY	DATE
APPROVED BY	DATE

WFDCONN 深圳市旺富达电子有限公司 Shenzhen WFD Electronics Co.Ltd..

TITLE: 3.5H 带扣弹片

THIRD ANGLE PROJECTION | REVISE ON CAD ONLY

PART NO. WFD-3001M2160022-10 | DWG NO. | SHEET NO. 1/1

A4