


REV	DESCRIPTION	APPR	CHECK	DRAW	DATE
0	原始图档			Liu Miao	140905

RoHS Compliant

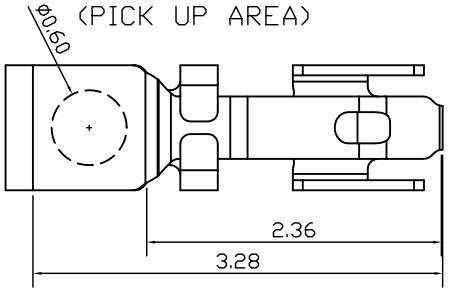


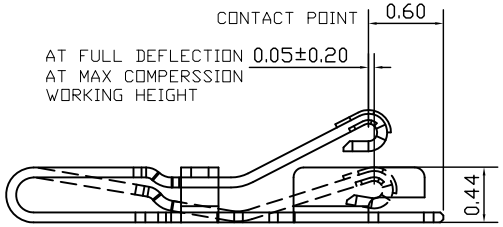


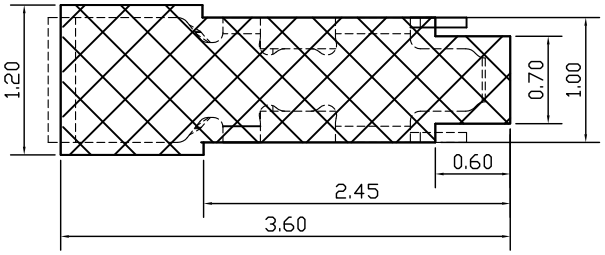


P.C.B LAYEOUT

TOLERANCE: ±0.05

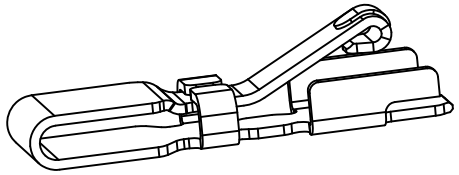


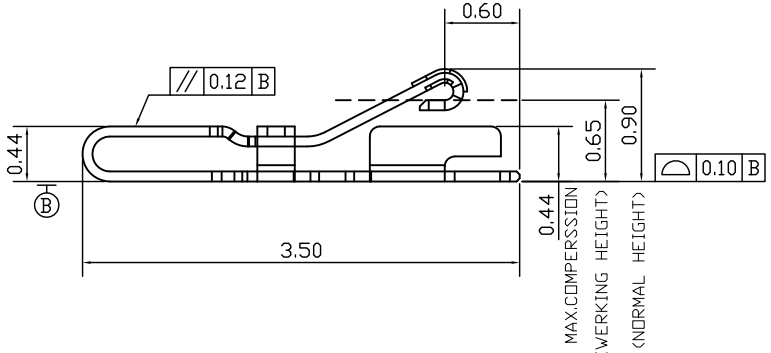



PRODUCT NO.

1. SPECIFICATIONS:
   - 1.1. CONTACT RESISTANCE:30MΩ MAX
   - 1.2. VOLTAGE RATING:1.5V/AC/DC/MAX
   - 1.3. CURRENT RATING:1.0A/MAX
   - 1.4. DPERATING TEMPERATURE:-20°C~80°C
2. MATERIAL:
   - 2.1. SUS304 T=0.10MM
3. FINISH:
   - 3.1. 1u"AU ON CONTACT AREA
   - 3.2. GOLD FLASH PLATING ON SOLDER AREA
   - 3.3. 80u" MIN. NICKEL UNDERPLATING OVERALL

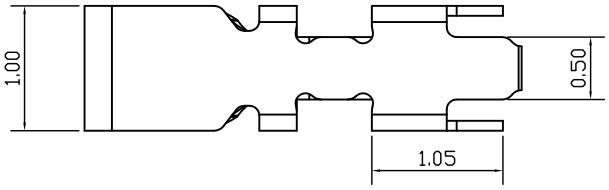

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)			
	MM		INCH	
▽0	.X	±0.25	.X	呼----
	.XX	±0.15	.XX	呼----
	.XXX	±0.10	.XXX	呼----
	ANGULAR ±1°			
C▽0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			

SCALE: 1:1	NUMBER:
MATERAIL:	HRC:
DRAWN BY: Liu Miao	DATE: 140905
CHECKED BY	DATE
APPROVED BY	DATE

WFDCONN 深圳市旺富达电子有限公司 Shenzhen WFD Electronics Co.Ltd..

TITLE: 带扣弹片 0.9H

THIRD ANGLE PROJECTION | REVISE ON CAD ONLY

PART NO.: WFD-3001M2160022-12 | DWG NO. | SHEET NO.: 1/1

A4