
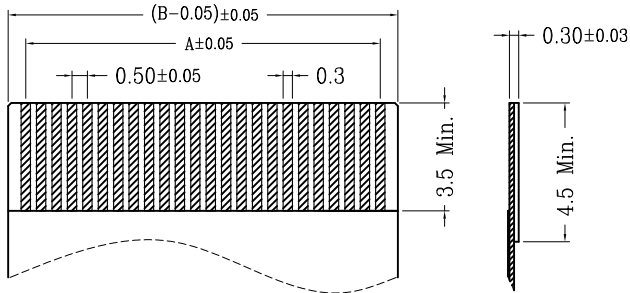
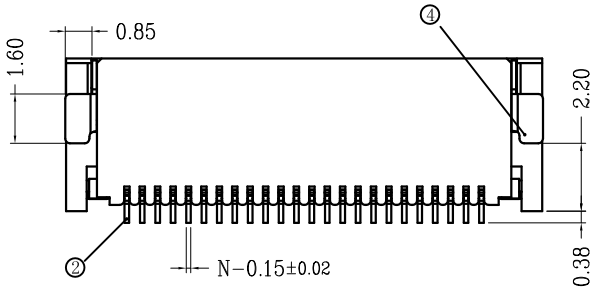
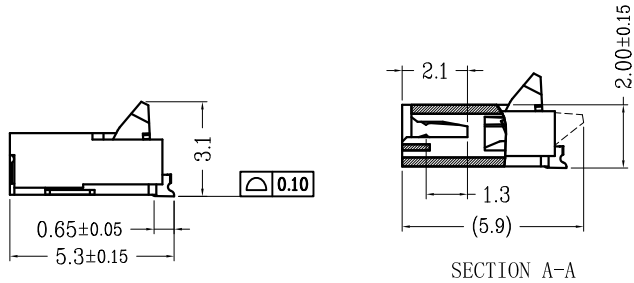
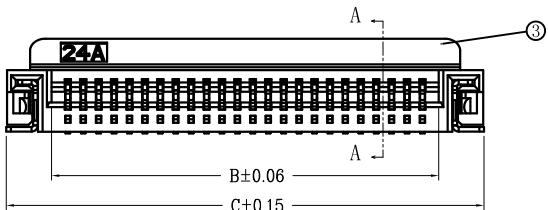
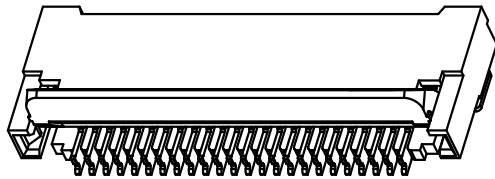


| | | | | | |
|---------|--------------------------|------------|---------|----------|--------------|
| 版次(Ed') | 变更摘要(Change The Content) | 日期(Date) | 序号(NO.) | 品名(Name) | 材质(Material) |
| 0 | 增加料号说明 | 2022/03/23 | | | |

| | | |
|---|---|--|
| ① | 0.5后锁胶芯(H=2.0) 0.5 PH Backflip Type Housing(H=2.0) | LCP UL94V-0 本色 Natural |
| ② | 0.5后锁端子(H=2.0) 0.5 PH Backflip Type Terminal(H=2.0) | 磷青铜/表面镀金 Phosphor Bronze/ Gold Plating |
| ③ | 0.5后锁后盖(H=2.0) 0.5 PH Backflip Type Actuator(H=2.0) | LCP UL94V-0 黑色 Black |
| ④ | 0.5后锁焊片(H=2.0) 0.5 PH Backflip Type Fitting Nail(H=2.0) | 磷青铜/表面镀锡 Phosphor Bronze/ Tin Plating |

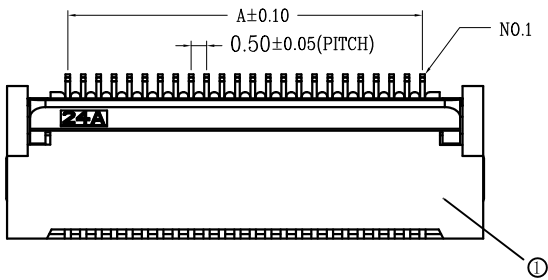


| CKT | A | B | C | CKT | A | B | C |
|-----|------|-------|------|-----|------|-------|------|
| 4 | 1.5 | 2.56 | 5.5 | 33 | 16.0 | 17.06 | 20.0 |
| 5 | 2.0 | 3.06 | 6.0 | 34 | 16.5 | 17.56 | 20.5 |
| 6 | 2.5 | 3.56 | 6.5 | 35 | 17.0 | 18.06 | 21.0 |
| 7 | 3.0 | 4.06 | 7.0 | 36 | 17.5 | 18.56 | 21.5 |
| 8 | 3.5 | 4.56 | 7.5 | 37 | 18.0 | 19.06 | 22.0 |
| 9 | 4.0 | 5.06 | 8.0 | 38 | 18.5 | 19.56 | 22.5 |
| 10 | 4.5 | 5.56 | 8.5 | 39 | 19.0 | 20.06 | 23.0 |
| 11 | 5.0 | 6.06 | 9.0 | 40 | 19.5 | 20.56 | 23.5 |
| 12 | 5.5 | 6.56 | 9.5 | 41 | 20.0 | 21.06 | 24.0 |
| 13 | 6.0 | 7.06 | 10.0 | 42 | 20.5 | 21.56 | 24.5 |
| 14 | 6.5 | 7.56 | 10.5 | 43 | 21.0 | 22.06 | 25.0 |
| 15 | 7.0 | 8.06 | 11.0 | 44 | 21.5 | 22.56 | 25.5 |
| 16 | 7.5 | 8.56 | 11.5 | 45 | 22.0 | 23.06 | 26.0 |
| 17 | 8.0 | 9.06 | 12.0 | 46 | 22.5 | 23.56 | 26.5 |
| 18 | 8.5 | 9.56 | 12.5 | 47 | 23.0 | 24.06 | 27.0 |
| 19 | 9.0 | 10.06 | 13.0 | 48 | 23.5 | 24.56 | 27.5 |
| 20 | 9.5 | 10.56 | 13.5 | 49 | 24.0 | 25.06 | 28.0 |
| 21 | 10.0 | 11.06 | 14.0 | 50 | 24.5 | 25.56 | 28.5 |
| 22 | 10.5 | 11.56 | 14.5 | 51 | 25.0 | 26.06 | 29.0 |
| 23 | 11.0 | 12.06 | 15.0 | 52 | 25.5 | 26.56 | 29.5 |
| 24 | 11.5 | 12.56 | 15.5 | 53 | 26.0 | 27.06 | 30.0 |
| 25 | 12.0 | 13.06 | 16.0 | 54 | 26.5 | 27.56 | 30.5 |
| 26 | 12.5 | 13.56 | 16.5 | 55 | 27.0 | 28.06 | 31.0 |
| 27 | 13.0 | 14.06 | 17.0 | 56 | 27.5 | 28.56 | 31.5 |
| 28 | 13.5 | 14.56 | 17.5 | 57 | 28.0 | 29.06 | 32.0 |
| 29 | 14.0 | 15.06 | 18.0 | 58 | 28.5 | 29.56 | 32.5 |
| 30 | 14.5 | 15.56 | 18.5 | 59 | 29.0 | 30.06 | 33.0 |
| 31 | 15.0 | 16.06 | 19.0 | 60 | 29.5 | 30.56 | 33.5 |
| 32 | 15.5 | 16.56 | 19.5 | 80 | 39.5 | 40.56 | 43.5 |

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena.)
2. 温度范围(Temperature range): -25° C~+85° C.
3. 额定电压(Rated voltage): 50V, AC/DC(=等效).
4. 接触电阻(Contact resistance): ≤0.03Ω.
5. 绝缘电阻(Insulation resistance): ≥500MΩ
6. 产品料号(Product material No.):

适用扁平线(Applicable Flat Cable)

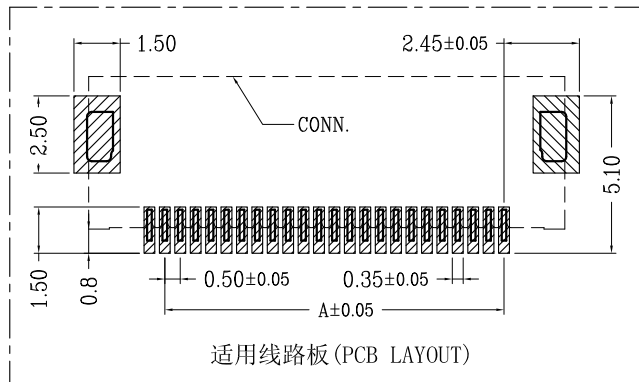

CFPCHW05200A-*** * **

NO OF CKT (产品PIN数) 后盖无LOGO(Actuator without LOGO)

Plating(电镀方式) Packing(包装方式)

0: 端子全雾锡(Terminal all mist tin) T: TUBE管装

1: 端子全金(G/F OVERALL) R: TAPE & REEL卷装

6: 端子点镀金(Contact and weld area gold-plated)



一般公差(TOLERANCE)
X ±0.50 .XX ±10
X ±0.20 .XXX ±05
ANGLES ±1°

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

品名(TITLE) 0.5 Pitch后锁卧式(H=2.0) 制图(DR) Liu Miao

0.5 Pitch H2.0 Backflip R/A Type CONN. 校对(CHKD) SIMON

料号(DWG.NO) CFPCHW05200A-****-** 审核(APPD) DAVID

比例(SCALE) 1:1 单位(UNITS) mm 张数(SHEET) 1 OF 1 SIZE A4 REV A