


版次(Ed')	变更摘要(Change The Content)	日期(Date)
1	增加料号说明(Add Material Number Description)	2020/11/25


序号	品名	材质
①	0.5拉拔3代胶芯(H2.0) 0.5 Pitch ZIF Type 3 Housing (H=2.0)	LCP UL94V-0 本色 **Natural**
②	0.5拉拔立式3代端子 0.5 Pitch ZIF S/T Type 3 terminal	磷青铜/表面镀锡 Phosphor Bronze/ Tin Plating
③	0.5拉拔3代后盖(H2.0) 0.5 Pitch ZIF Type 3 Actuator (H=2.0)	LCP UL94V-0 黑色 **Black**
④	0.5拉拔3代焊片(H2.0) 0.5 Pitch ZIF Type 3 Fitting Nail (H=2.0)	黄铜/表面镀锡 Brass/Tin Plating

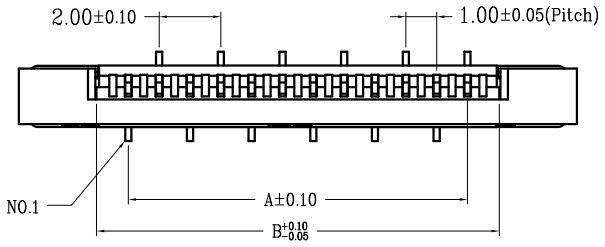






SECTION A-A

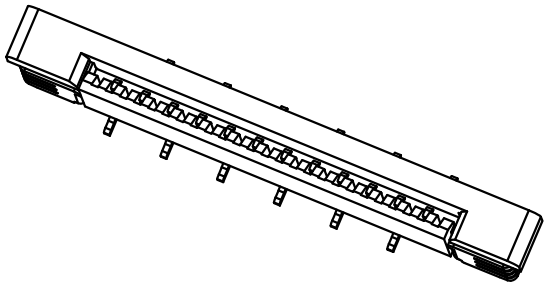

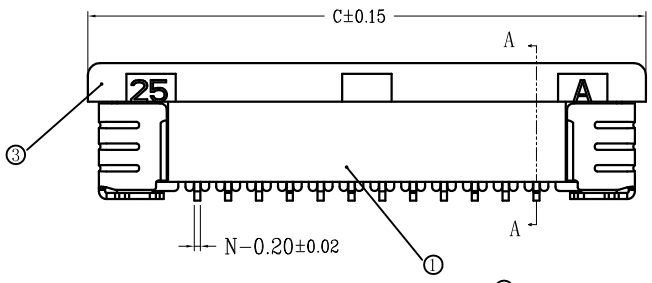




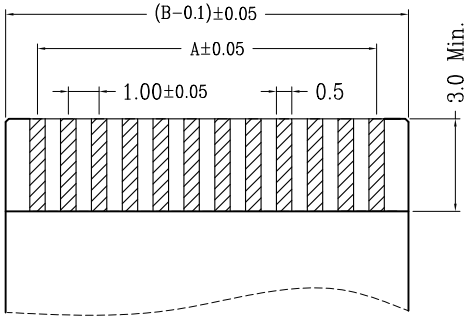



适用扁平线(Applicable Flat Cable)



With cover

CKT	A	B	C	D
4	3.00	5.06	10.1	4.5
5	4.00	6.06	11.1	
6	5.00	7.06	12.1	
7	6.00	8.06	13.1	
8	7.00	9.06	14.1	
9	8.00	10.06	15.1	
10	9.00	11.06	16.1	
11	10.00	12.06	17.1	
12	11.00	13.06	18.1	
13	12.00	14.06	19.1	
14	13.00	15.06	20.1	
15	14.00	16.06	21.1	
16	15.00	17.06	22.1	
17	16.00	18.06	23.1	5.0
18	17.00	19.06	24.1	
19	18.00	20.06	25.1	
20	19.00	21.06	26.1	
21	20.00	22.06	27.1	
22	21.00	23.06	28.1	
23	22.00	24.06	29.1	
24	23.00	25.06	30.1	
25	24.00	26.06	31.1	
26	25.00	27.06	32.1	
27	26.00	28.06	33.1	
28	27.00	29.06	34.1	
29	28.00	30.06	35.1	
30	29.00	31.06	36.1	

技术指标(Technical Index):

1. 塑件表面应光洁、无毛边、无明显收缩、 缺陷、裂纹等现象.
(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena.)
2. 温度范围(Temperature range): -25° C～+85° C.
3. 额定电压(Rated voltage): 50V, AC/DC(=等效).
4. 接触电阻(Contact resistance): ≤0.03Ω.
5. 绝缘电阻(Insulation resistance): ≥500MΩ.
6. 产品料号(Product material No.):


CFPCLL10453A—** * *—**

NO OF CKT(产品PIN数)

Plating(电镀方式)
- 0: 端子全雾锡(Terminal all mist tin)
- 1: 端子全金(Terminal G/F OVERALL)

Packing(包装方式)
- 空白 后盖无LOGO(Actuator without LOGO)
- T: TUBE管装
- R: TAPE & REEL卷装
- M: TAPE & REEL WITH MYLAR贴MYLAR卷装
- N: TUBE & WITH MYLAR贴MYLAR管装
- C: TAPE & REEL WITH COVER加吸盖卷装

适用线路板(PCB LAYOUT)

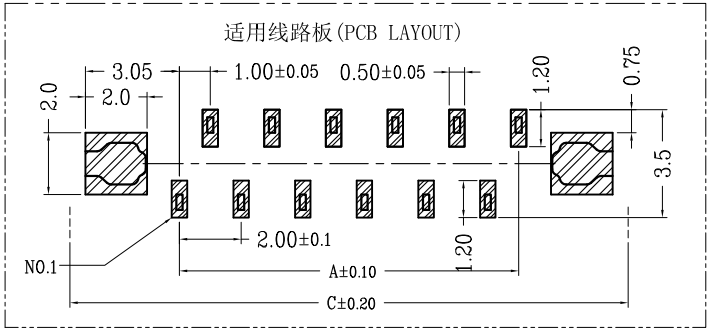

RoHS

一般公差(TOLERANCE)
X. ±.50 .XX ±.10
.X ±.20 .XXX ±.05
ANGLES ±1°

WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

品名 (TITLE): 1.0 Pitch 拉拔立式全包正脚位
1.0 Pitch H4.5 ZIF S/T Positive Pointer Type CONN.

料号 (DWG.NO): CFPCLL10453A-****-**

制图 (DR): Liu Miao
校对 (CHKD): SIMON
审核 (APPD): DAVID

比例 (SCALE): 1:1
单位 (UNITS): mm
张数 (SHEET): 1 OF 1
SIZE: A4
REV: A