


奇数脚位(Singnumber)


版次	变更摘要	日期
1	增加料号说明	2021/3/18


序号	品名	材质
①	1.0K型胶芯(H2.5) 1.0K Type Housing (H2.5)	LCP UL94V-0 本色 **Natural**
②	1.0K型立式端子(H5.5) 1.0 Pitch ZIF S/T Type K terminal(H5.5)	磷青铜/表面镀锡 Phosphor Bronze/ Tin Plating
③	1.0K型卧式后盖(H2.5) 1.0K Type Actuator (H2.5)	LCP UL94V-0 黑色 **Black**
④	1.0K型立式焊片(H5.5) 1.0 Pitch ZIF Type K Fitting Nail(H5.5)	黄铜/表面镀锡 Brass/Tin Plating

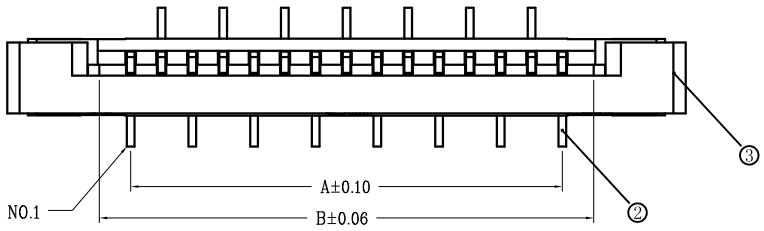

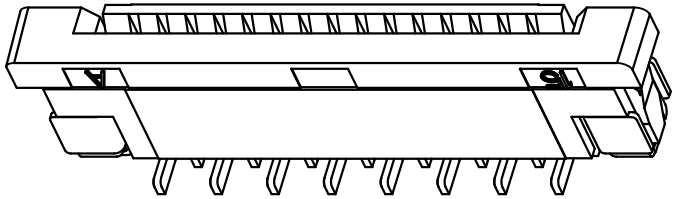


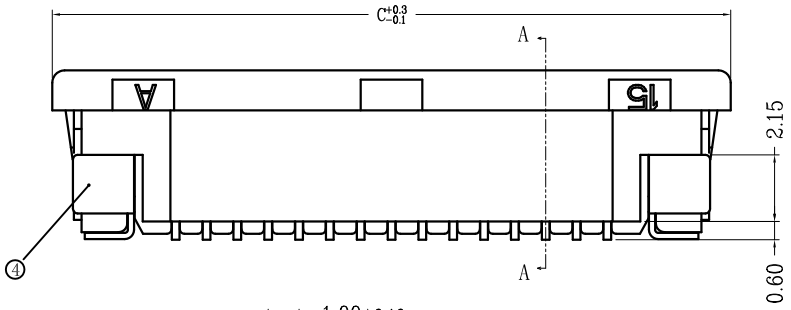

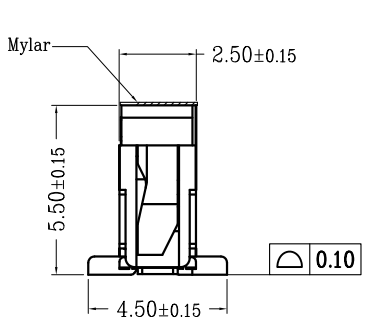





SECTION A-A



WITH COVER

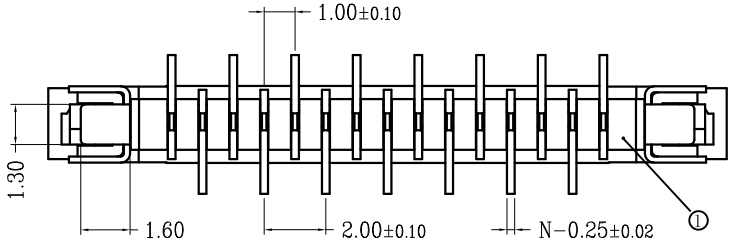

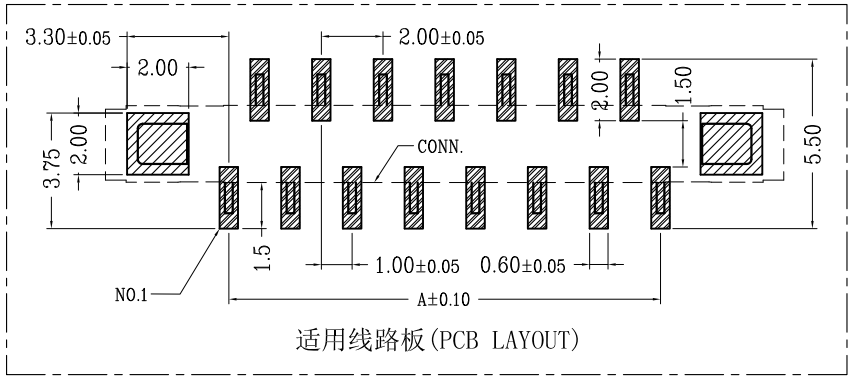

适用线路板(PCB LAYOUT)

CKT	A	B	C
4	3.00	5.06	11.10
5	4.00	6.06	12.10
6	5.00	7.06	13.10
7	6.00	8.06	14.10
8	7.00	9.06	15.10
9	8.00	10.06	16.10
10	9.00	11.06	17.10
11	10.00	12.06	18.10
12	11.00	13.06	19.10
13	12.00	14.06	20.10
14	13.00	15.06	21.10
15	14.00	16.06	22.10
16	15.00	17.06	23.10
18	17.00	19.06	25.10
19	18.00	20.06	26.10
20	19.00	21.06	27.10
22	21.00	23.06	29.10
24	23.00	25.06	31.10
25	24.00	26.06	32.10
26	25.00	27.06	33.10
28	27.00	29.06	35.10
30	29.00	31.06	37.10
32	31.00	33.06	39.10
35	34.00	36.06	42.10
36	35.00	37.06	43.10
40	39.00	41.06	47.10

技术指标(Technical Index):

1. 塑件表面应光洁、无毛边、无明显收缩、 缺陷、裂纹等现象.
(The surface of the plastic parts should be smooth,no rough edges,no obvious shrinkage,defects,cracks and other phenomena.)
2. 温度范围(Temperature range): -25° C～+85° C.
3. 额定电压(Rated voltage): 50V, AC/DC(=等效).
4. 接触电阻(Contact resistance): ≤0.03Ω.
5. 绝缘电阻(Insulation resistance):≥500MΩ.
6. 产品料号(Product material No.):


CFPCLL10553A—** * *—**

NO OF CKT(产品PIN数)

Plating(电镀方式)
- 0:端子全雾锡 (Terminal all mist tin)
- 1:端子全金(G/F OVERALL)

Packing(包装方式)
- T:TUBE管装
- R:TAPE & REEL卷装
- M:TAPE & REEL WITH MYLAR贴MYLAR卷装
- C:TAPE & REEL WITH COVER加吸盖卷装

空白 后盖无LOGO(Actuator without LOGO)

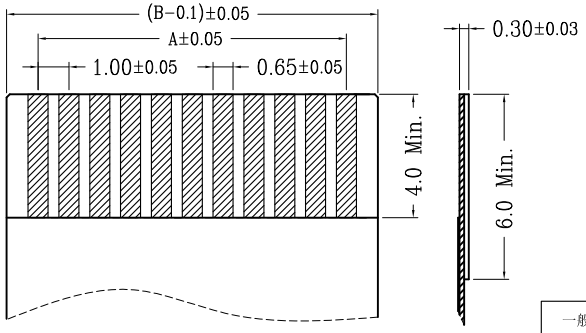

适用扁平线(Applicable Flat Cable)

RoHS

一般公差(TOLERANCE)
X. ±.50 .XX ±.10
.X ±.20 .XXX ±.05
ANGLES ±1°

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

品名 (TITLE) 1.0 Pitch K型立式正脚位带焊片
1.0 Pitch H5.5 ZIF S/T Positive Pointer Type CONN.

料号 (DWG.NO) CFPCLL10553A-****-**

比例 (SCALE) 1:1

单位 (UNITS) mm

制图 (DR) Liu Miao

校对 (CHKD) SIMON

审核 (APPD) DAVID

张数 (SHEET) 1 OF 1


SIZE A4


REV A


偶数脚位(Even number)


版次	变更摘要	日期
1	增加料号说明	2021/3/18


序号	品名	材质
①	1.0K型胶芯(H2.5) 1.0K Type Housing (H2.5)	LCP UL94V-0 本色 **Natural**
②	1.0K型立式端子(H5.5) 1.0 Pitch ZIF S/T Type K terminal(H5.5)	磷青铜/表面镀锡 Phosphor Bronze/ Tin Plating
③	1.0K型卧式后盖(H2.5) 1.0K Type Actuator (H2.5)	LCP UL94V-0 黑色 **Black**
④	1.0K型立式焊片(H5.5) 1.0 Pitch ZIF Type K Fitting Nail(H5.5)	黄铜/表面镀锡 Brass/Tin Plating

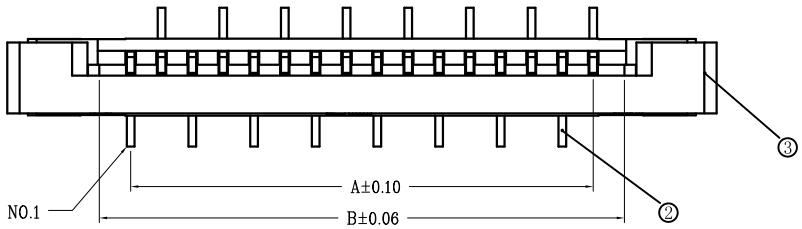

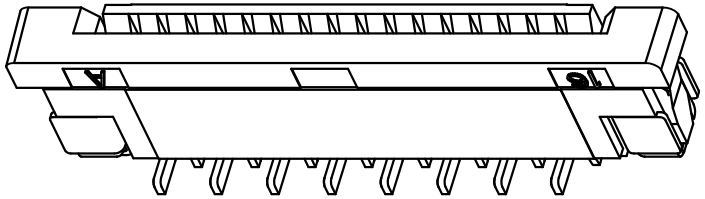


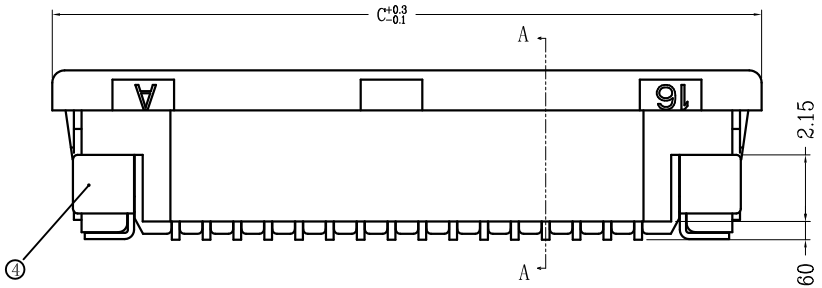

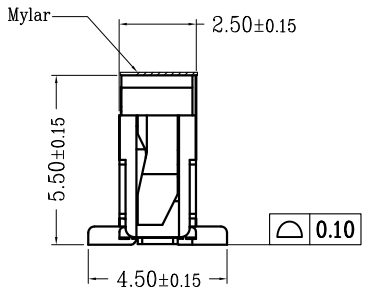





SECTION A-A



WITH COVER

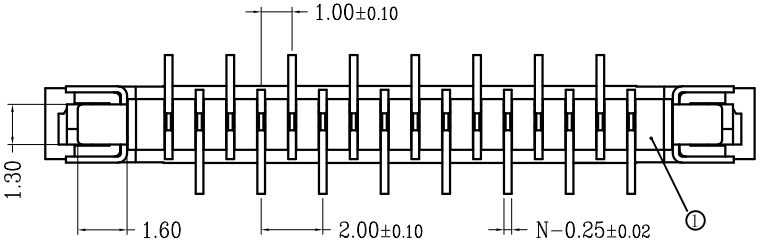

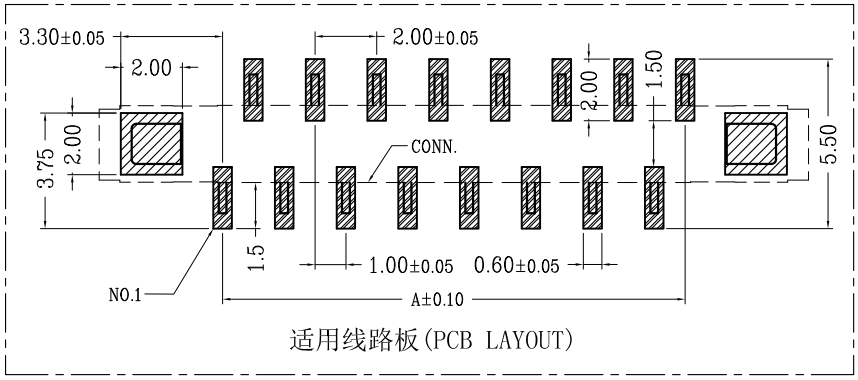

适用线路板(PCB LAYOUT)

CKT	A	B	C
4	3.00	5.06	11.10
5	4.00	6.06	12.10
6	5.00	7.06	13.10
7	6.00	8.06	14.10
8	7.00	9.06	15.10
9	8.00	10.06	16.10
10	9.00	11.06	17.10
11	10.00	12.06	18.10
12	11.00	13.06	19.10
13	12.00	14.06	20.10
14	13.00	15.06	21.10
15	14.00	16.06	22.10
16	15.00	17.06	23.10
18	17.00	19.06	25.10
19	18.00	20.06	26.10
20	19.00	21.06	27.10
22	21.00	23.06	29.10
24	23.00	25.06	31.10
25	24.00	26.06	32.10
26	25.00	27.06	33.10
28	27.00	29.06	35.10
30	29.00	31.06	37.10
32	31.00	33.06	39.10
35	34.00	36.06	42.10
36	35.00	37.06	43.10
40	39.00	41.06	47.10

技术指标(Technical Index):


1. 塑件表面应光洁、无毛边、无明显收缩、 缺陷、裂纹等现象.
(The surface of the plastic parts should be smooth,no rough edges,no obvious shrinkage,defects,cracks and other phenomena.)
2. 温度范围(Temperature range): -25° C～+85° C.
3. 额定电压(Rated voltage): 50V, AC/DC(=等效).
4. 接触电阻(Contact resistance): ≤0.03Ω.
5. 绝缘电阻(Insulation resistance):≥500MΩ.
6. 产品料号(Product material No.):

CFPCLL10553A—** * *—**

NO OF CKT(产品PIN数)

Plating(电镀方式)
- 0:端子全雾锡 (Terminal all mist tin)
- 1:端子全金(G/F OVERALL)

Packing(包装方式)
- 空白 后盖无LOGO(Actuator without LOGO)
- T:TUBE管装
- R:TAPE & REEL卷装
- M:TAPE & REEL WITH MYLAR贴MYLAR卷装
- C:TAPE & REEL WITH COVER加吸盖卷装

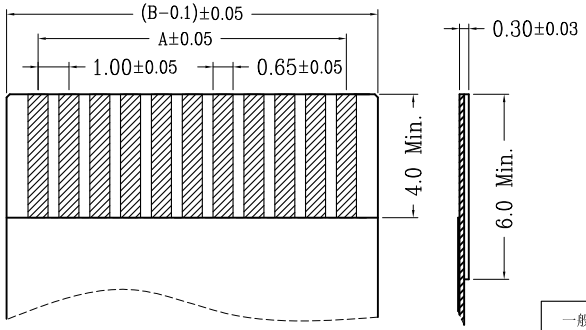

适用扁平线(Applicable Flat Cable)

RoHS

一般公差(TOLERANCE)
X. ±.50 .XX ±.10
.X ±.20 .XXX ±.05
ANGLES ±1°

WFD 深圳市旺富达电子有限公司
CONN SHEN ZHEN WFD ELECTRONICS CO., LTD

品名 (TITLE) 1.0 Pitch K型立式正脚位带焊片
1.0 Pitch H5.5 ZIF S/T Positive Pointer Type CONN.

料号 (DWG.NO) CFPCLL10553A-****-**

制图 (DR) Liu Miao
校对 (CHKD) SIMON
审核 (APPD) DAVID

比例 (SCALE) 1:1
单位 (UNITS) mm
张数 (SHEET) 1 OF 1
SIZE A4
REV A