
| SER | DESCRIPTION | CHK DATE |
|---|---|---|
| | | |
| | | |

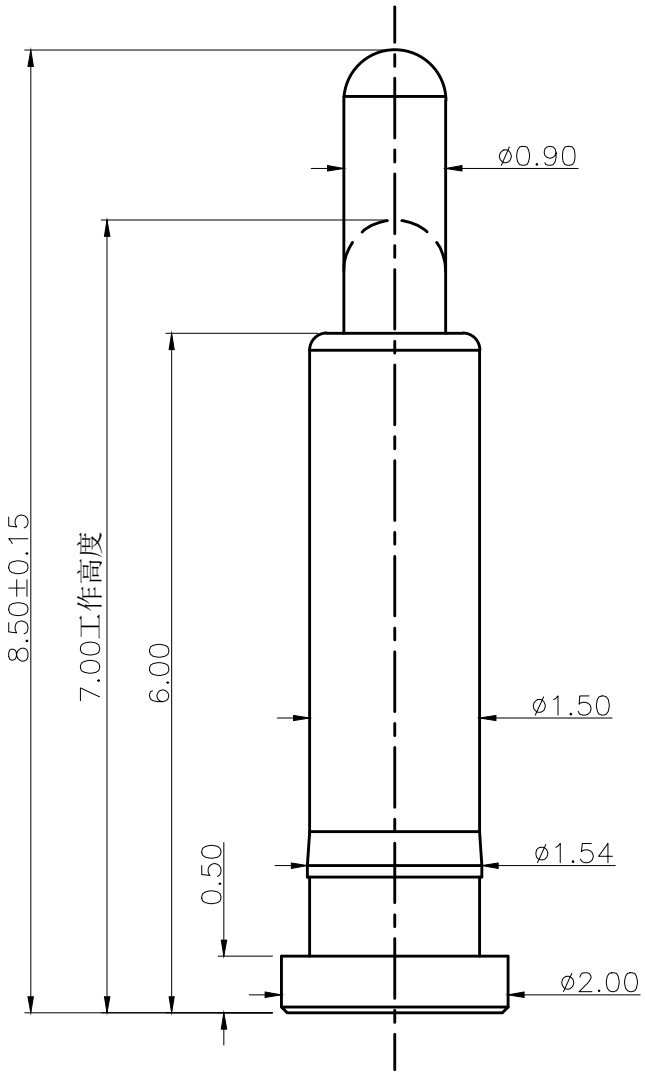


NOTE
1.Material
Plunger: Brass C3604
Barrel: Brass C3604
Spring: SUS 304
2.Plating
Plunger: 3 micro-inch minimum Au over 50~100 micro-inch nickel
Barrel: 3 micro-inch minimum Au over 50~100 micro-inch nickel
3.Electrical
Rated current & voltage: DC 12V; 1A MAX .
Contact resistance: 50 mohm maximum at working height
4.Mechanical
Spring force: 100g±20g at working height
Durability: 10,000 cycles(minimum)
5.RoHS compliant product.
6.Mark * is the key control dimension
7.Pass the salt spray test for 48 hours

| 名称 | 零件料号 | 用量 |
|---|---|---|
| 针头 | TH0015-0103 | 1 PCS |
| 针管 | GF6077-0103 | 1 PCS |
| 弹簧 | X | 1 PCS |

WFD CONN 深圳市旺富达电子有限公司
SHEN ZHEN WFD ELECTRONICS CO., LTD

| | | | | |
|---|---|---|---|---|
| UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X.X ±0.15 X.XX ±0.10 X.XXX ANG. ±2° | APPROVED BY | DATE | TITLE | |
| | CHECKED BY | DATE | POGO PIN | |
| | DRAWN BY Liu Miao | DATE 2021/10/23 | DOCUMENT NO DN0XX-00X | PAGE 1 |
| UNIT mm | SIZE A4 | PART NO PGC-0.5-8.5-1PIN | REV A / SHEET 1/1 | SCALE 1:1 |