




| REV. | ECN NO | LOCATIONS | DESCRIPTION | DATE |
|---|---|---|---|---|
| | | | | |

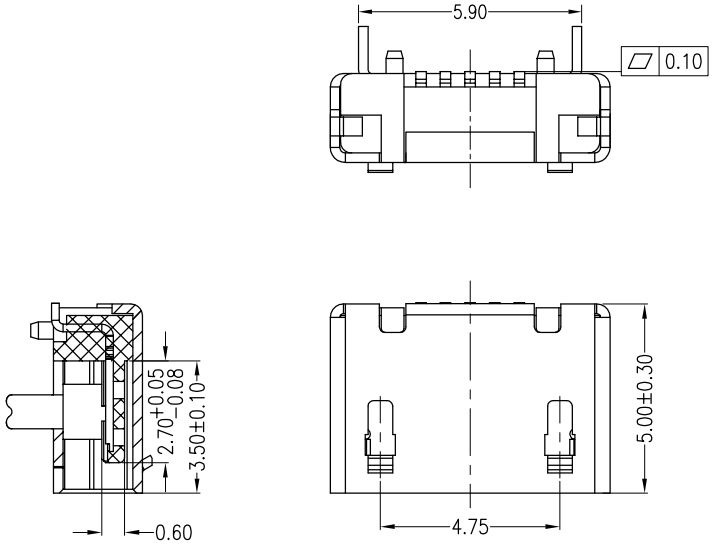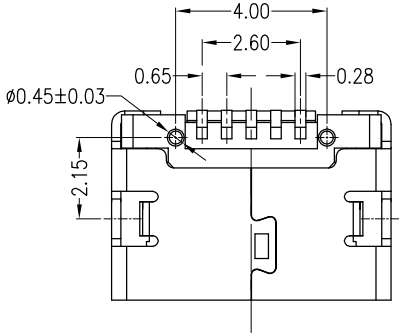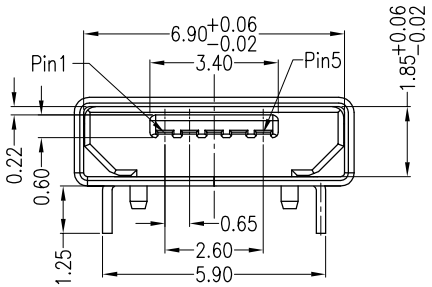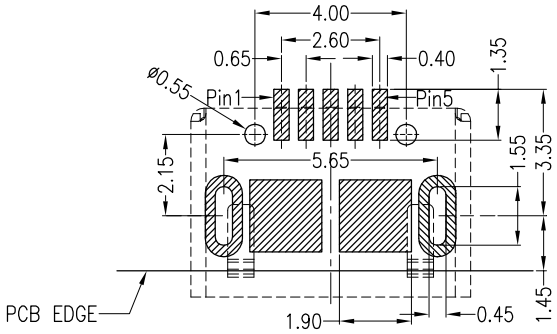


RECOMMANDED PCB LAYOUT

PCB图仅供参考

Note:
1.Material:
- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: copper alloy,t=0.20mm
- 1.3 Shell: copper alloy,t=0.25mm

2.Specification:
- 2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -30°C~80°C

外壳材质
1:C2680R-H

外壳电镀
1:NI0.1u'
2:雾锡5u'
3:NI+Au1u' (脚)
4:Au1u'

端子电镀 01:Au1u' ;02:Au1.5u' ;03:Au3u'
05:Au5u' ;10:Au10u' ;15:Au15u' ;30:Au30u'

主体颜色 B:黑色

主体材质 1:LCP

端子材质 4:C5191R-EH

| | | | |
|---|---|---|---|
| PART NO: USB-F06505-SC103 | | MATERAL: SEE NOTE | WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD |
| MODEL NO: XX | | FINSH: SEE NOTE | |
| UNIT: MM | SIZE: A4 | COLOR: SEE NOTE | TITLE: Micro usb 5s AB Type 有柱插板5.9无导位脚长1.25 |
| TOLERANCE UNSPECIFIED<br>.x 0.15<br>.xx 0.10<br>.xxx 0.05<br>Ang. 1° | | DR: LIU MIAO | DWG NO: A507 REV: A |
| | | CHK: SIMON | |
| | | APP: DAVID | SCALE: 5:1 DATE: 2015.01.10 |