

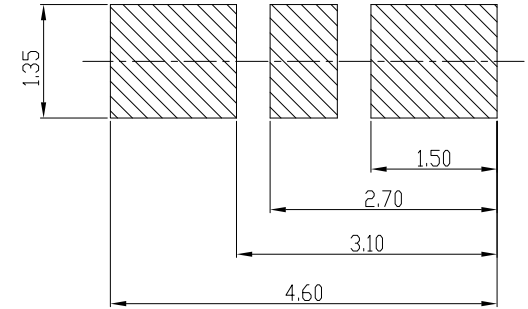

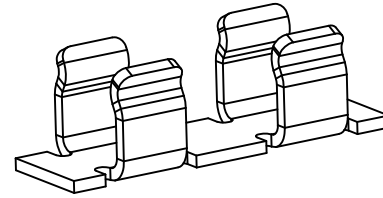




REV.	ECN. NO.	APPD.
A		LIU MIAO

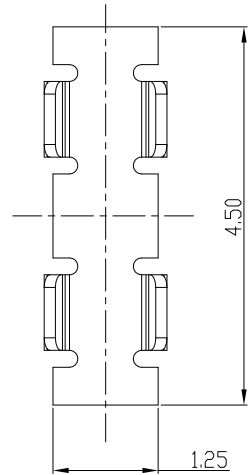

RECOMMENDED PCB LAYOUT
TOLERANCE ±0.05MM
(FOR REFERENCE ONLY)

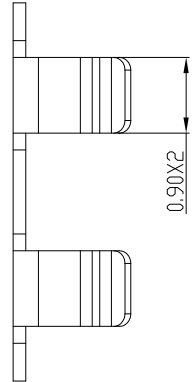

NOTES:

- 1:MATERIAL:
1-1: SUS301 R-H,T=0.15mm.
- 2:FINISH:
2-1: 50~120μ" MATTE-SN PLATING OVER NICKEL,
30~150μ" NICKEL UNDERPLATING OVER ALL.
- 2-2: DIMENSIONS WITHOUT TOLERANCE PLEASE REFER TO TOLERANCE TABLE ,
STRUCTURE WITHOUT DIMENSIONS PLEASE REFER TO 3D DRAWING.
- 3:SPECIFICATIONS:
3-1.RATING CURRENT: 2A.
3-2.RATING VOLTAGE: 10V
3-3.CONTACT RESISTANCE:50mΩ MAX.
3-4.OPERATING TEMPERATURE: -40℃~+85℃.
- 4.PACKING SPECIFICATION:REEL&TAPE
- 5.COMPLIANT TO RoHS & LEAD FREE

EXTEND USE RF Cable Fixing			WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD		
X. ± /	X*. ± 2°	MAT'L SEE NOTES	TITLE Cable Clip	PART NO. 24.082A3-0001R0	
.X ± 0.25	.X* ± 1°	UNITS mm	APPD: DAVID	DWG NO CABLE_CLIP_004	
.XX ± 0.15	.XX* ± /	FINISH SEE NOTES	CHKD: SIMON	SCALE SHEET REV.	
.XXX± /	.XXX*± /		DR: LIU MIAO	1:1	1/1 A

