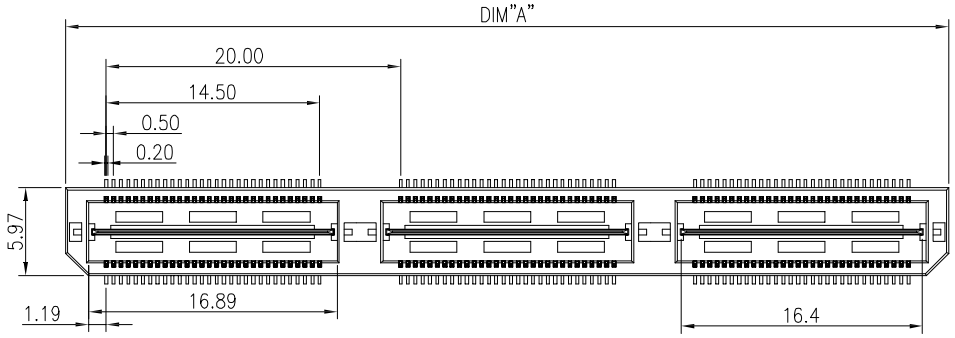



NOTES:


1.HUOSING: LCP HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK

2.TERMINAL/GROUND PLANE:PHOSPHOR BRONZE
PLATING:10u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.


3.CODING INFORMATION: BB 242-xxxP-B3R-01


- WATER CODE
- PACKING: R: CARRIER REEL
- MATERIAL: 3:LCP
- COLOR: B:BLACK
- P:PLUG
- PIN
- PLATING: G:GOLD FLASH 2:3u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
  3:5u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
  4:10u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
  5:15u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
  6:30u" GOLD IN CONTACT AREA, MATTE TIN ON TAIL.
- 0.5 BTB
  HIGHLY: 42--4.26H
- WFD CONN BTB CONNECTOR SERIES

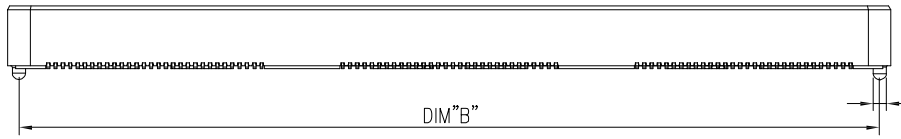



SECTION A-A

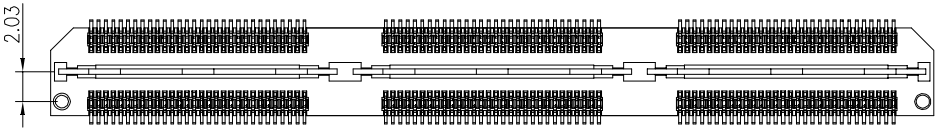

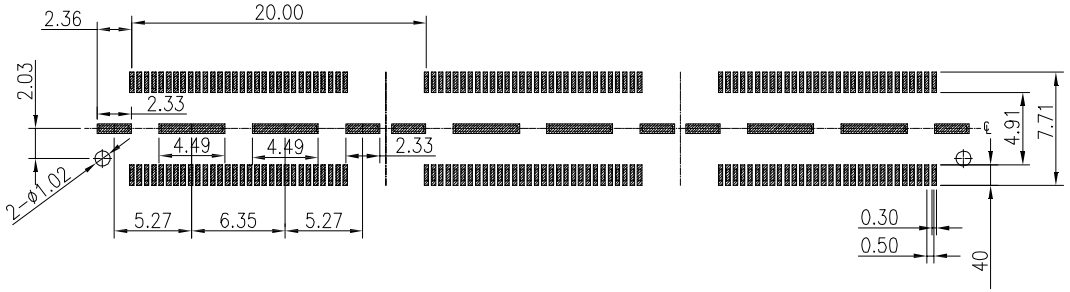

NO. of contacts	Dimensions		
	A.	B.	C.
60	20.00	18.48	0.10
120	40.00	38.48	0.10
180	60.00	58.48	0.15
240	80.00	78.48	0.15
300	100.00	98.48	0.15

RoHS Compliant 2013/95/EC

Pb Process Capable

修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE

CUSTOMER

WFD CONN 深圳市旺富达电子有限公司 SHEN ZHEN WFD ELECTRONICS CO., LTD

一般公差 GENERAL TOLERANCE
.X ±0.25
.XX ±0.20
.XXX ±0.10
ANGLES ±1°

制图 (DR): LIU MIAO

品名(TITLE): 0.5mm DOUBLE ROW BTB PLUG H4.26

审核 (CHKD):

料号(PART NO): BB 242-XXXP-B3R-01 (QTH)

版本 (REV) A

核准 (APPD):

比例(SCALE) 1:8

单位(UNITS) mm

张数(SHEET) 1 OF 1

图幅(SIZE) A4